



The state-of-the-art, active bezel video wall of choice for organizations wanting the highest quality.




Specifications	OneScreen Video Wall with OneScreen Video Wall Controller	Eyevis Video Wall EYE-LCD-5500-ESN-FX Controller: NETPIX 4900 PLUS
Display		
Pixel Pitch	0.63mm	0.63mm
Resolution (per panel)	1920 x 1080	1920 x 1080
Diagonal Length of Panel	55"	55"
Viewing Angle	178°	178°
Input Ports (on panel)	DVI, HDMI, RS232, USB	Video, Y/C, DVI-I (digital/analog), HDMI, DisplayPort, RS232
Wall Type	LED Backlit	LCD IPS - Panel
Bezel Width	None	1.8mm
Active Bezel	Yes	No
Warranty	3 years	-
Power Requirements	AC 100-240V, 50/60 Hz	100V to 240V AC, 50-60 Hz
Power Consumption Max (per panel)	220W	245W
Colors	1.07G	1.07G
Contrast	4000 : 1	1200:1
Brightness	500-700 cd/m2	700 cd/m2
Response Time	2 ms	8 ms
Noise Free Operation	Yes	Yes
Environment	Indoor	Indoor
Operating Temperature	0 - 40° C	0 - 40° C
Humidity	≤ 90% (No Condensation)	10-80% RH
Weight	30kg	30kg
Dimensions	47.8" x 27" x 3.2"	47.69" x 26.86" x 4.43"
Controller		
Picture in Picture Display	Yes	Yes
Input Signal Preview in UI	Yes	Yes
Cross-screen Displaying	Yes	Yes
OS Supported	Windows2000/XP/Vista/7/8/10	Windows Server 2008/R2 64bit, Windows 7 Ultimate 64bit

Maximum Number of Outputs	144	64
Input Ports	DVI/VGA/HDMI/SDI/YPbPr/Optical/ Twisted-pair, Dual-link DVI, CVBS	S-video, SDI, HD-SDI, 3-SDI, DVI, Dual link DVI, HDMI, DP
Output Ports	DVI, HDMI, AV, RS232, VGA	Display Port
3D Video Wall Display	Yes (Processor 980)	No
Maximum No. of Display (per panel)	4	4
Resolution Real-time Total Adaptation	Yes	No
Screen Overlapping	Yes	Yes
HDCP Compliant	Yes	No

*Specifications are subject to change at any time without notice.
Copyright April 2017. All rights reserved

Video-wall

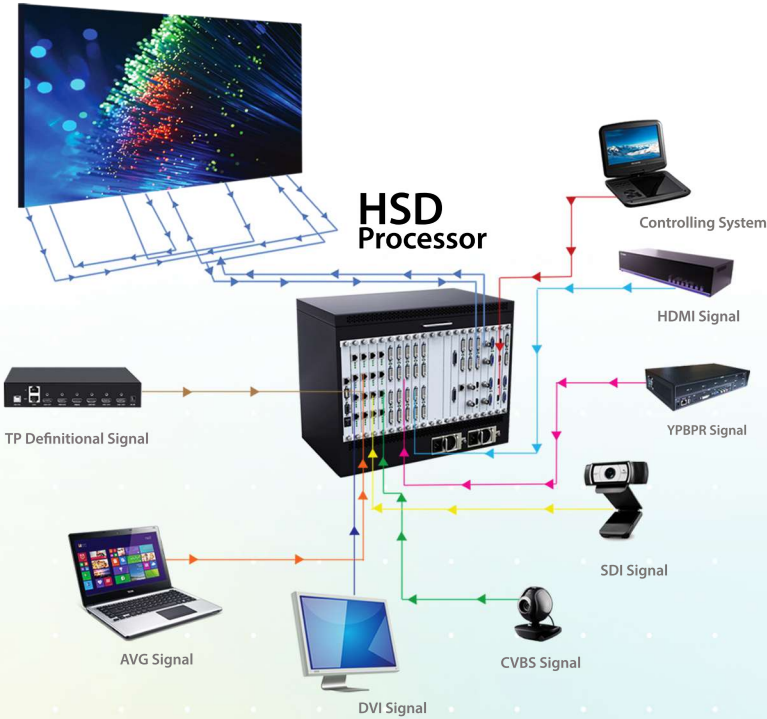

CALL US AT 800.992.5279
onescreensolutions.com/ sales@onescreensolutions.com